




AmericanBiltrite
Flooring

Declare.

**Red List
Free**

INTERNATIONAL LIVING
FUTURE INSTITUTE

AB PURE | MARATHON RUBBER STAIR TREADS

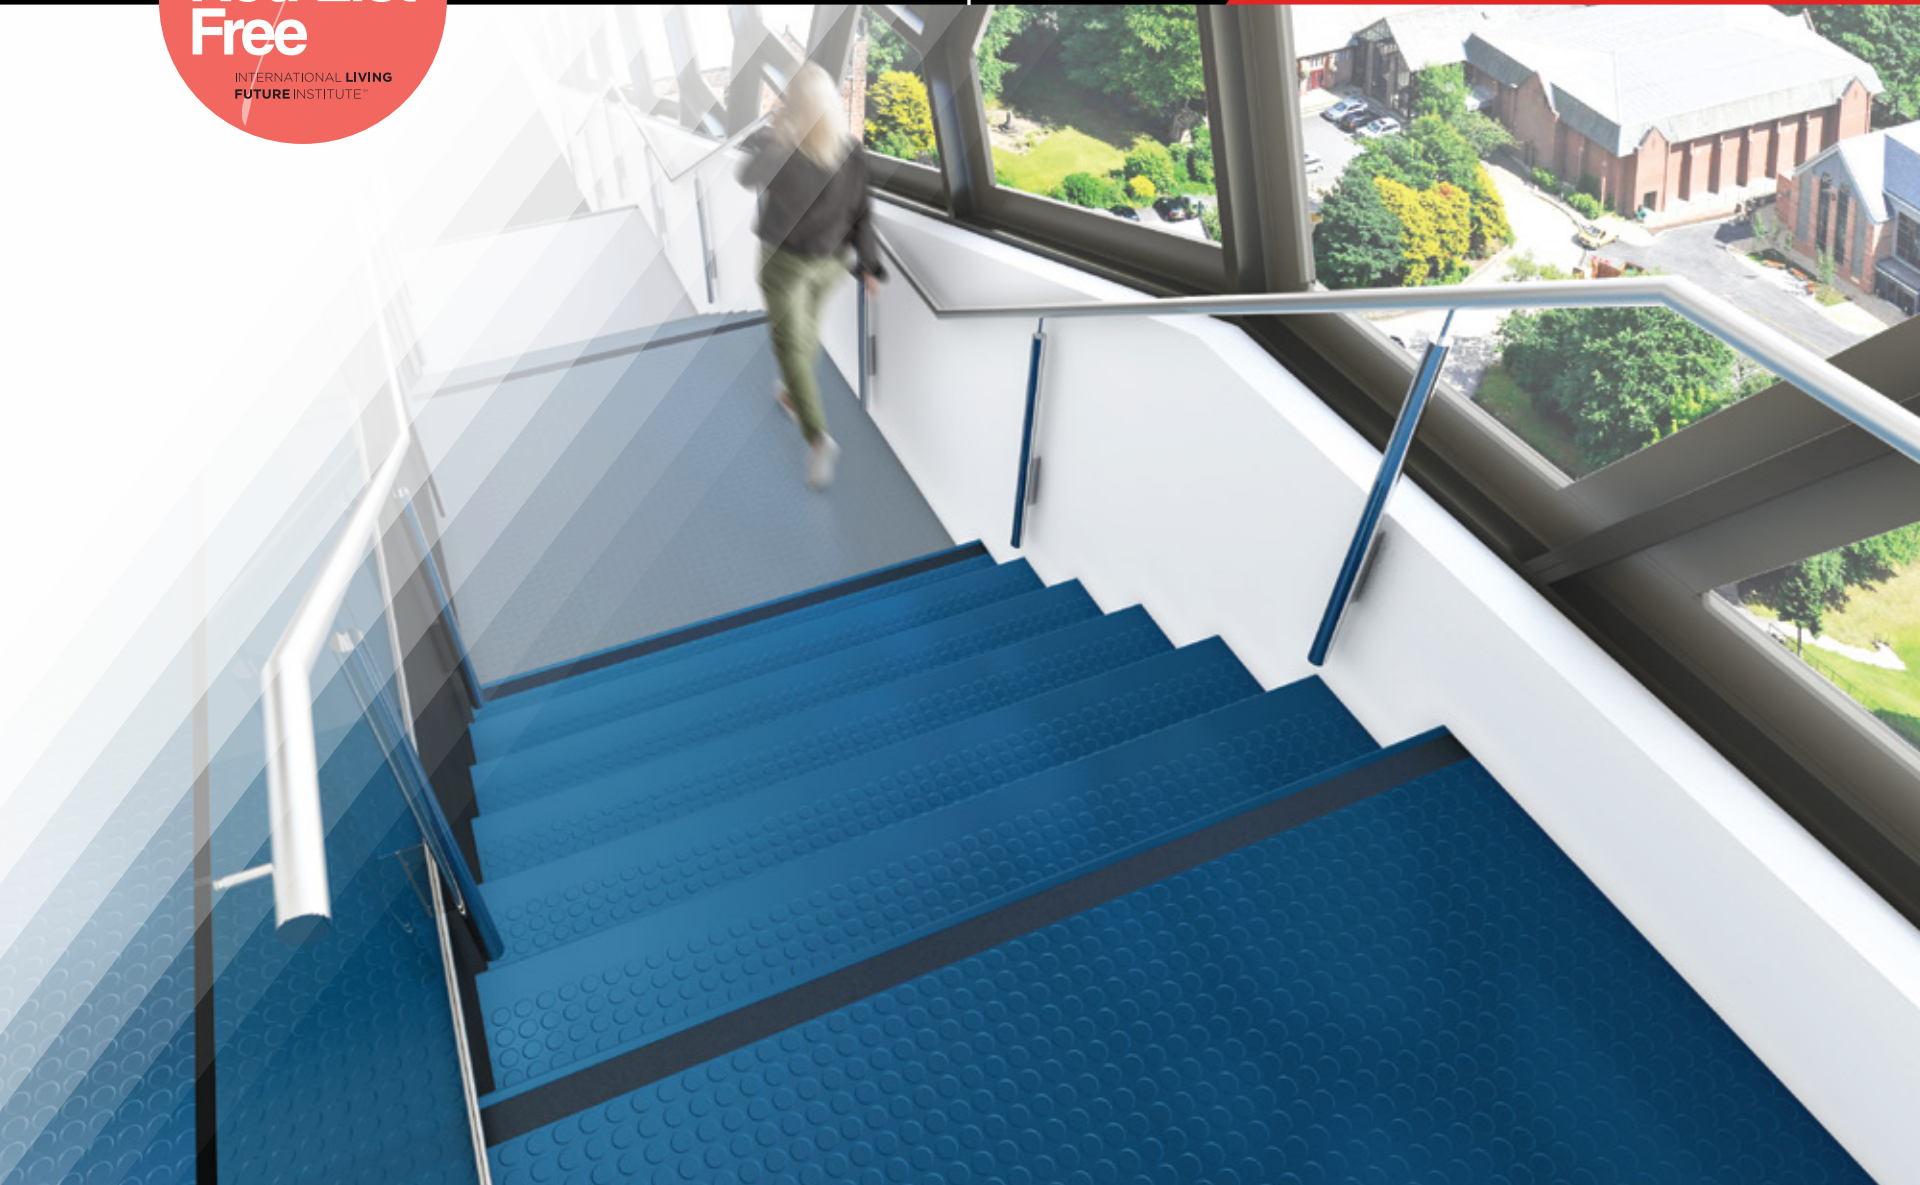



American Biltrite Stair Treads

Today stair treads are more than just a material used to avoid slippage, they have become an integral part of the overall design statement. Recognizing this need, American Biltrite introduces a complete stair tread system that delivers on the promise of color and design, safety and durability as well as ease of maintenance.

**Red List
Free**

INTERNATIONAL LIVING
FUTURE INSTITUTE

ABPure® and Marathon® rubber flooring products are **Red List Free** and part of the Living Building Challenge **Declare** Program.

What is Declare?

The program provides a clear and informative label for building products and supports the Living Building Challenge's Red List for material transparency and toxic chemical avoidance as well as simplifying material specification and project certification.

What is the Red List and what does it mean to be Red List Free?

The Red List represents the “worst in class” materials, chemicals, and

elements known to pose serious risks to human health and the greater ecosystem. For a product to be awarded Red List Free status means that it does not contain any ingredients on the Living Building Challenge Red List.


To learn more about the Living Building Challenge, visit www.living-future.org/lbc.

Declare.

A Complete System

Stair Tread System


Featuring tread, nose and riser in **a single piece.**

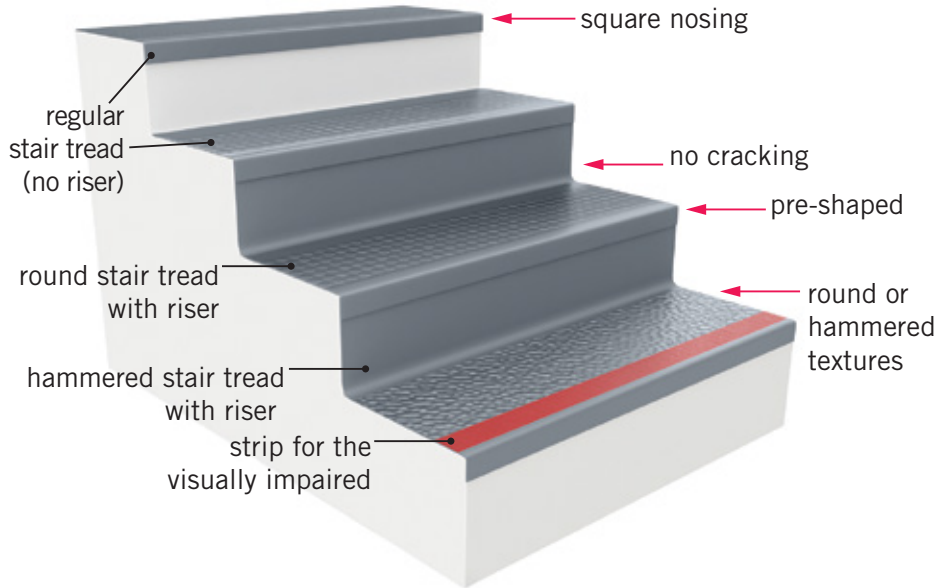

- Offering a comprehensive selection of stair treads in both regular stair treads and stair treads with riser combinations.
- Available in two designs: Round and Hammered. Both are available in ABPURE with colorfast technology and MARATHON compounds.
- The system is complemented with the addition of Landing Tile that matches the stair treads in Round and Hammered designs.
- The entire program is **Declare “Red List Free”**.

Carborundum Strips


These strips can be added to your stair treads for added traction and as visual aids.



VIT-82
Nightglow



VIT-72
Yellow



VIT-22
Black



VIT-52
Red



VIT-15
White

AB PURE[®]


COLORS SHOWN IN ABPURE HAMMERED PROFILE
ALL STAIR TREADS AVAILABLE IN HAMMERED AND ROUND PROFILES



RTM-15
Snowstorm



RTM-35
Ash gray




RTM-38
Steel



RTM-32
Appalachian trail




RTM-37
Battleship Gray



RTM-23
Anthracite




RTM-20
Starry night




RTM-30
Sand castle



RTM-45
Wheat




RTM-36
Tan




RTM-83
Pistachio



RTM-85
Olive green



RTM-87
Tundra



RTM-39
Camouflage Green



RTM-72
Limoncello



RTM-75
Orangerine




RTM-52



RTM-55
Fire engine red




RTM-57
Chestnut



RTM-58
Espresso



RTM-56
Shiraz



RTM-92
Aquamarine



RTM-98
Blue Lagoon



RTM-95
Electric blue



RTM-68
Rich lavender



RTM-66
Doll house



 Width: 36" (0.914 m) 48" (1.219 m) 72" (1.828 m)  Gauge: 0.125" (3.17 mm)  Gauge: 0.140" (3.5 mm)

MARATHON[®]


COLORS SHOWN IN MARATHON ROUND PROFILE
ALL STAIR TREADS AVAILABLE IN HAMMERED AND ROUND PROFILES



RTR-133
Polished Pewter




RTR-123
Midnight Charcoal



RTR-120
Onyx Black



RTR-134
Platinum Gray




RTR-137
Carriage Gray



RTR-140
Sandstone Beige




RTR-148
Deep Chestnut



RTR-183
Lime Sorbet



RTR-190
Blue Willow




RTR-191
Night Sky

 Width: 36" (0.914 m)  48" (1.219 m)  72" (1.828 m)  Gauge: 0.125" (3.17 mm)  Gauge: 0.140" (3.5 mm)


Profiles

All stair treads available in hammered and round profiles

HAMMERED

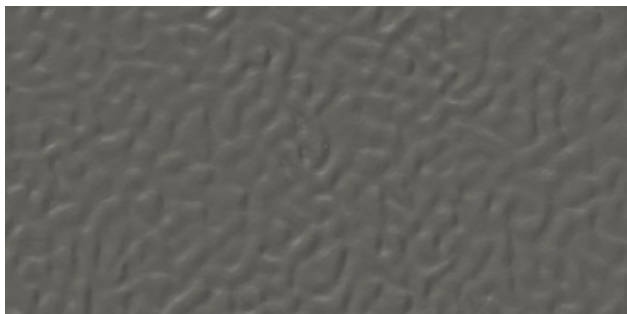

ROUND

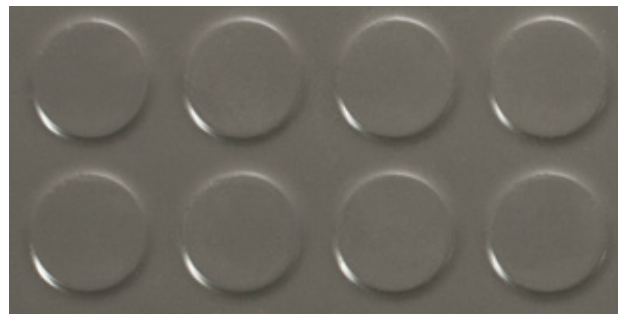

How to order:

1. Select product code from list below, e.g.: **RVP**
2. Select Color e.g.: **RVP-55**
3. Select Length e.g.: **RVP-55-36"**
4. Select Carborundum strip color (for visually impaired) e.g.: **RVP-55-36"- 5**
(use first digit of color code)

Product Codes:

AB Pure Round

- RTP** Regular Stair Tread
- RVP** Stair Tread for Vis. Impaired
- OPP** Stair Tread with Riser
- OVP** Stair Tread with Riser for Vis. Impaired

AB Pure Hammered

- RTM** Regular Stair Tread
- RVM** Stair Tread for Vis. Impaired
- OPM** Stair Tread with Riser
- OVM** Stair Tread with Riser for Vis. Impaired

Marathon Round

- RTR** Regular Stair Tread
- RVR** Stair Tread for Vis. Impaired
- OPR** Stair Tread with Riser
- OVR** Stair Tread with Riser for Vis. Impaired


Marathon Hammered

- RTH** Regular Stair Tread
- RVH** Stair Tread for Vis. Impaired
- OPH** Stair Tread with Riser
- OVH** Stair Tread with Riser for Vis. Impaired


Colors shown may vary according to production run.

Round Stair Treads


Regular Stair Treads
(RTP) (RTR)

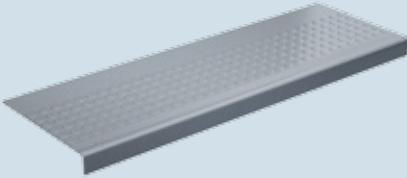


Stair Treads with Riser
(OPP) (OPR)

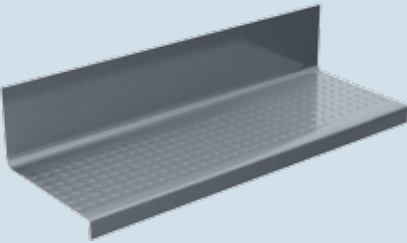

Stair Treads for the Visually Impaired
(RVP) (RVR)

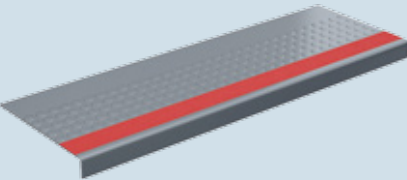


Stair Treads with Riser for the Visually Impaired
(OVP) (OVR)

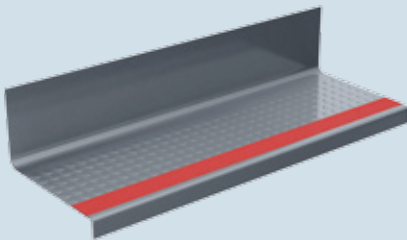


Hammered Stair Treads


Regular Stair Treads
(RTM) (RTH)

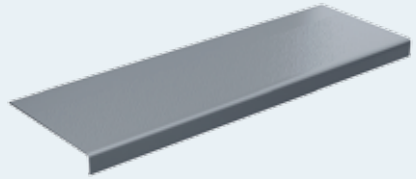


Stair Treads with Riser
(OPM) (OPH)

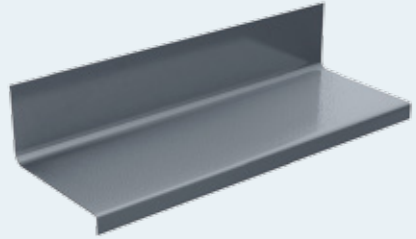

Stair Treads for the Visually Impaired
(RVM) (RVH)

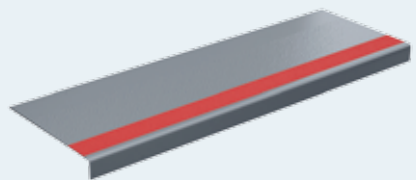

Stair Treads with Riser for the Visually Impaired
(OVM) (OVH)

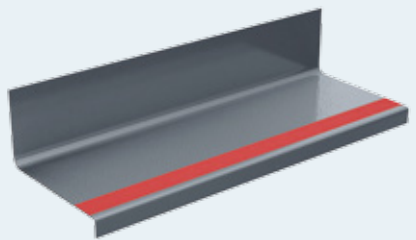



AmericanBiltrite
Flooring

AB PURE® & MARATHON® | RUBBER STAIR TREADS

TECHNICAL SPECIFICATIONS

Gauge	TREADS (Hammered & Round Profiles)		TREADS WITH RISERS (Hammered & Round Profiles)	
	3.17 mm (round) 3.50 mm (hammered)	0.125" 0.140"	3.17 mm (round) 3.50 mm (hammered)	0.125" 0.140"
Sizes	.914 m	36"	.914 m	36"
	1.219 m	48"	1.219 m	48"
	1.828 m	72"	1.828 m	72"
Depth	314.33 mm	12-3/8"	482.6 mm	19"
Nosing Depth	47.63 mm ADA compliant	1-7/8" ADA compliant	47.63 mm ADA compliant	1-7/8" ADA compliant
Nosing Radius	6 mm ADA compliant	1/4" ADA compliant	6 mm ADA compliant	1/4" ADA compliant
ASTM E 648	Critical Radiant Flux CRF (W/cm ²)		> 0.45	
ASTM E 662	Smoke Density		≤ 450	
ASTM E 989 / E 492	Sound Absorption (with a suspended ceiling)		IIC 59 dB	
ASTM F 925	Chemical Resistance		Meets requirements (details upon request)	
ASTM F 970	Static Load (modified at 1,000 psi for tile)		≤ 0.005"	
ASTM F 1514	Heat Stability (ABPURE)		ΔE ≤ 8	
ASTM F 1515	Light Stability (ABPURE)		ΔE ≤ 8	
ASTM F 2169	Resilient Stair Treads		Type TS Rubber Vulcanized Thermoset – Class 2 Group 1 & 2 (Visually Impaired Safety Strip)	
Indoor Air Quality (IAQ)	Volatile Organic Compounds (VOC's)		FloorScore Certified by SCS Certification - Registration Number SCS-FS-01492	
Declare			Red List Free	
Adhesive	AD-777 / AD-535 / Zip-Step™ tape		Regular traffic (AD-777, Zip-Step tape) / Heavy traffic (AD-535)	
Limited Wear Warranty			10 years	
Resistance to oils and greases	ABPURE® and Marathon® are not recommended for environments where they could be exposed to oils and greases, whether mineral, animal or vegetable.			
Antimicrobial/Antifungal	IMPORTANT: ABPURE® and Marathon® rubber flooring contains inhibitors that gives this flooring antimicrobial and antifungal properties.			

Please note that technical website documents prevail.

® ABPURE and Marathon are registered trademarks of American Biltrite
™ Zip-Step is a registered trademark in Canada | Trademark in USA

INSTALLATION

Optimal results can only be achieved by following manufacturer's instructions closely. Only adhesives approved by American Biltrite specifically for AB PURE and Marathon should be used for gluing. Detailed installation instructions can be found at www.american-biltrite.com and should be carefully followed.



American Biltrite 200 Bank Street, Sherbrooke,
Quebec J1H 4K3 Canada | american-biltrite.com
To order samples: flooring@american-biltrite.com
1.800.437.8743 | Technical Services: 1.800.479.0190